



WORK PLATFORMS

The World's Best with your Workers' safety built-in!

SHORT 10™
Meets ANSI/ITSDF Standards B56.8.24.1*
For most Rough Terrain Forklifts & Material Handlers 48" x 116"

MADE IN USA



WP48-116-FL shown with optional center gate

APPLICATIONS

- Telescopic Material Handlers
- Rough Terrain Forklifts
- Warehousing & In-plant forklifts

Product Features:

UNIVERSAL FIT

Fork pockets accepts 2 3/4" thick, 6" wide forks
 Fork pockets spaced 48" except on WP48-48-FL
 Steel Pins secure frame behind heel of forks for safety
 Different spacing of fork pockets available by special order
 Transportation fork pockets are standard equipment

FLOOR

Heavy duty expanded metal for longer life and durability

WORK SAFE GUIDE

ALL WORK PLATFORMS ship with a Work Safe Booklet. This Booklet helps users understand the OSHA rules and regulations regarding proper use of Work Platforms.

GUARD RAIL

Heavy duty 1 1/4" square tubing that exceeds the 200 lb. capacity requirement
 Top rail is located at 42" height
 Toe board is 4" high with 50 lb. capacity rating
 Removable guard rails for ease of transportation
 Lanyard anchor points standard (# Vary with length of unit)
 Optional "O" rings available

FULL LENGTH GATES

Dual locking access gates with safety stops. Gates swing in for safety and are located at each end

***The "Short 10™" is the widest work platform to meet OSHA & ASNI requirements for standard equipment application.**

ANSI/ITSDF standard for elevating personnel B56.8.24.1 reads: *floor dimensions which shall not exceed two times the load center distance listed on the rough terrain forklift truck nameplate, measured parallel to the longitudinal center plane of the truck {measured across the load bearing tires plus 10 in. (250 mm) on either side}.*

*Most Rough Terrain Forklifts & Material Handlers are 96" wide, plus the 20" allowed past the load bearing tires equal the 116" width of the AMH "Short 10".




800-821-7563

1620 Oakland Avenue, Kansas City, MO 64126
 Phone (816) 231-4410. FAX: (816) 241-9137
 E-mail: sales@AMHAttachments.com
 or visit: AMHAttachments.com




WORK PLATFORMS

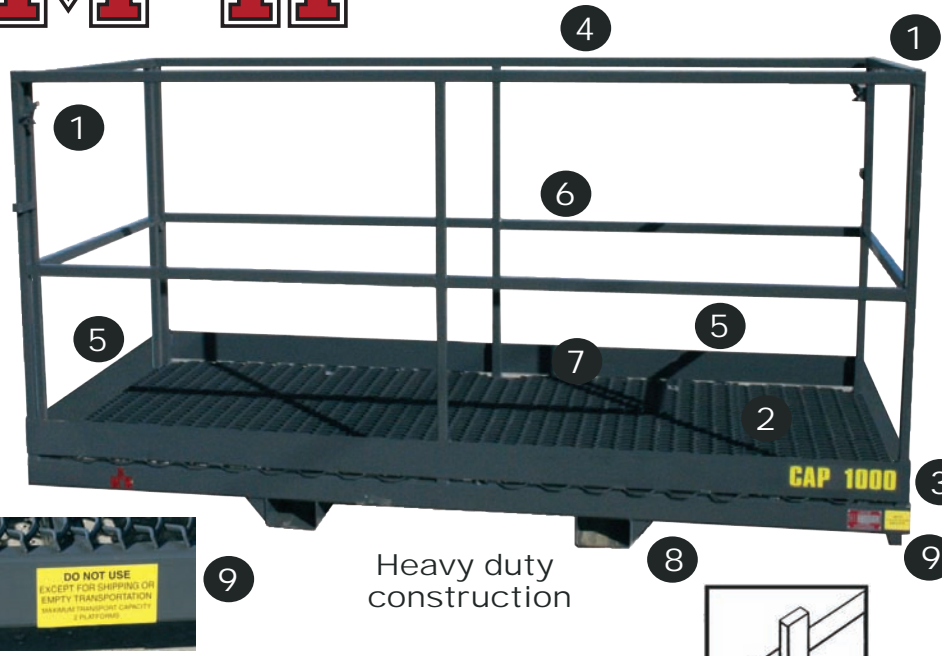

1. Full length dual locking access gates with safety stops
2. Expanded Steel flooring
3. 1000 lbs* Capacity (Platform rating only) Check your forklift for its capacity.
4. 42" guard rail
5. 4" high toe board
6. 1.25" square steel tubing
7. Lanyard anchor points (# varies with length) located at the toe board level
8. Steel fork pockets with safety pin
9. Pockets for transportation ONLY



9 Heavy duty construction



3 Safety pins shown installed



Available with Direct Mount Hitch Plates to fit your coupler (No forks or frame required).

OPTIONAL EQUIPMENT:



CENTERED FRONT GATE:
Optional WP48-116CG-FL with 45" centered front gate.



UTILITY WORK PLATFORM:
WP48-72CO Fixed non-removable rack work access to 3 sides of poles with 24" cutout.

MODEL NUMBER	SIZE	FORK SPREAD
WP48-48-FL	48" x 48"	36"
WP48-96-FL	48" x 96"	48"
WP48-116-FL	48" x 116" *	48"
WP 48-192-FL	48" x 192"	48"

*SHORT 10 is highlighted in yellow



24" WORK TABLE:
WP24-24T work table allows handy placement of tools, equipment and other supplies.

MAST GUARD:
WP24-72MG mast protection screens must be ordered when used on any truck with a vehicle mast or lift mechanism which poses a safety hazard. Standard size is 42" wide by 72" high. When used with a 48" long platform only one gate is operational.

MADE IN USA



800-821-7563

Visit: AMHAttachments.com
International Toll Free: 877-821-7575